

not be used for longer than 5 seconds.)

WARRANTY: Streetwise Security Products extends a lifetime warranty to the SWJC17 for the product against defects in materials or workmanship, with the following exceptions:

1. The warranty does not cover damage resulting from accident, misuse or abuse, lack of reasonable care, moisture, the affixing of any attachment not provided with the product, loss of parts, or recharging the unit in any manner not in accordance with the included instructions.
2. The warranty will be voided if the unit has been opened or tampered with in any way (unless by an authorized dealer) or if any unauthorized replacement parts have been used.
3. To obtain service contact the Authorized Dealer from whom you purchased this unit for a Return Merchandise Authorization. The return unit must be sent postage prepaid and proof of purchase is required. Damage or loss occurring during shipment is not covered by this warranty.

NOTICE: Purchaser must check and abide by all local laws governing the possession and use of stun guns. In addition, the stun gun must only be used in a lawful manner for self-defense.

NOTE: Not to be used on children, persons with heart disease, or any vital part of the human body. Not to be stored or used in environments where it is damp or humid or where there are extreme hot or cold temperatures. Do not use on metal objects.

Conditions of Sale: Purchase of this product is an agreement by the purchaser/ user to hold all sellers and manufacturers harmless of all liabilities and damages.

Revised 03-30-2017





READ and SAVE these instructions BEFORE use.



JUSTin CASE SWJC17

PATENT PENDING

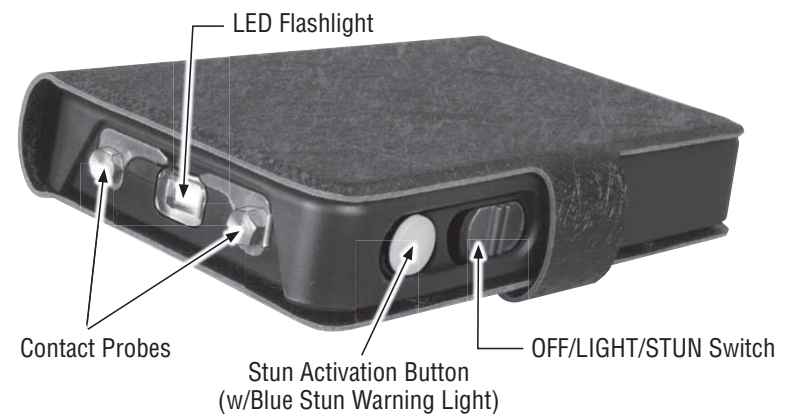

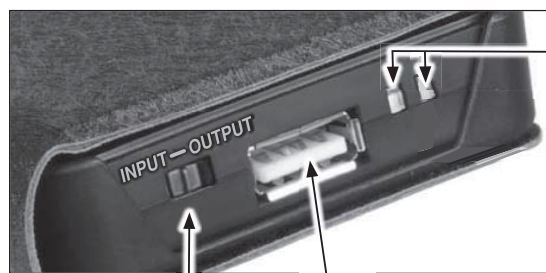

Charging Indicator Lights
Red: Charging
Green: Fully Charged

INPUT-OUTPUT Switch

USB Charging Port

Charging the JUSTin CASE

- Move the OFF/LIGHT/STUN switch down to the OFF position for charging.
- Move the INPUT-OUTPUT Switch to the left (INPUT position).
- Plug the USB charging cord (included) into the Charging Port on the bottom of the unit, plug the other end into a USB wall charger (not included), then plug the wall charger into a wall outlet.
- The charging indicator lights are RED when charging; lights change to GREEN when fully charged.

Important Charging Notes

- The body of the device may become warm while charging.
- Even if used infrequently the unit should be recharged for four hours every two months.
- If the flashlight is working but the stun gun is not, the unit is not defective - it just needs to be charged.
- If you attempt to charge the JUSTin CASE but do not see either the red or green indicator lights on the bottom of the unit check to be sure the Input-Output Switch is set to Input.

Charging Other Devices with the JUSTin CASE

- Move the OFF/LIGHT/STUN Switch down to the OFF position.
- Move the INPUT-OUTPUT Switch to the right (OUTPUT) position.
- Connect your device-compatible charging cable (not the included cable) into the device you wish to charge and the USB end into the JUSTin CASE USB Charging Port.
- The charging indicator on your **other device** will indicate the charging, the charging indicator lights on the JUSTin CASE will not come on.



Important: Although this charging feature can provide your phone with up to

20 hours of standby you need to be careful not to drain all power from the JUSTin CASE in the event that you would need to use it for self-defense.


Using the JUSTin CASE Flashlight:

Slide the OFF/LIGHT/STUN Switch to the middle position. The bright LED will illuminate. Slide the switch back down to turn off the light.

Test Firing the JUSTin CASE Stun Gun:

We recommend test firing the stun gun and becoming familiar with its operation before you need to use it to defend yourself. (WARNING: Do not test fire the stun gun for more than one second as this will damage the unit and void the warranty.)

1. Slide the OFF/LIGHT/STUN Switch (located on the side of the unit) up two positions to the STUN position (the Blue Stun Warning Light on the Stun Activation Button will illuminate).
2. Press the Stun Activation Button to test fire the unit. Do not hold down the button for more than one second. You will see and hear a charge fire across the top of the unit between the electrodes.
3. Important: Slide the OFF/LIGHT/STUN Switch on the side of the unit down to the OFF position when you have finished test firing.

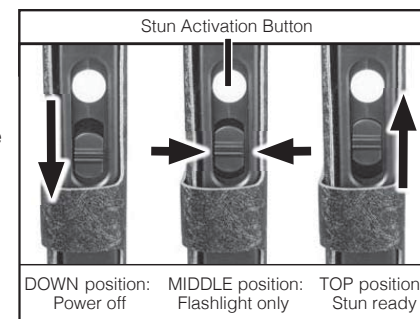

Using the JUSTin CASE in Self Defense:

1. With the OFF/LIGHT/STUN Switch (located on the side of the unit) in the STUN position touch your assailant's body with the contact probes and press the Stun Activation Button.
2. Touching anywhere on the assailant's body will have an effect. However, the maximum effect is achieved in the areas shown to the right:
3. When touching the assailant's body, you will not see or hear the electrical charge as you do when the unit is test fired. You can hold the Stun Activation Button down for more than 1 second, as this will not damage the unit as it will when being test fired.
4. You do not have to be concerned about the effects of the charge being transferred to you. Even if the assailant touches you while being stunned, you will not feel the effects of the charge.



Effects of the JUSTin CASE on an Assailant

1. Touching an assailant for less than 1 second will cause minor muscle contractions and have a repelling effect.
2. Touching an assailant for 1 to 2 seconds will cause muscle spasms and a dazed mental state.
3. Touching an assailant for 3 to 5 seconds will cause loss of balance and muscle control, total mental confusion, and disorientation. All effects to the assailant are temporary; the stun gun can cause no permanent harm. (NOTE: The device should